


BS 336 Instantaneous Coupling Adapter (FEMALE)



A fire hose cannot be directly connected to a fire hydrant.

Used by SCDF, the female coupling adapter is required to be screwed onto a fire hydrant before a fire hose can connect to the fire hydrant.

Instead of two "ears", the female coupling adapter has a single twist for the firemen to operate with one hand as the other hand will be used to pull or push the fire hose's male end.

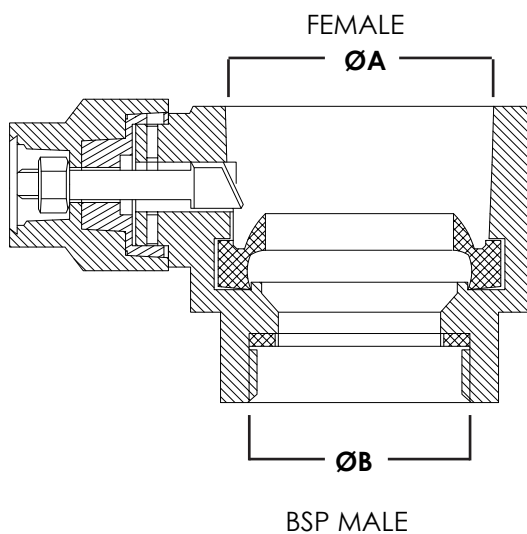

Information

Made according to BS 336 with rust resistant brass alloy.

Used in Singapore Fire Service

Manufactured to:

British Standard 336:2010
Specifications for fire hose couplings and ancillary equipment

Also known as:

BS Coupling, BS 336 Coupling, British Standard Coupling, Instantaneous Coupling

DESCRIPTION	ØA ID	ØB	PART NO
2.5" INST ADAPTER		2.0" BSP M	
2.5" INST ADAPTER		2.5" BSP M	ADA-G-BSF25-01
2.5" INST ADAPTER		2.0" BSP F	ADA-G-BSF25-04
2.5" INST ADAPTER		2.5" BSP F	ADA-G-BSF25-05