

# ABS

## 25KG · 50KG · 100KG

### ABC Multipurpose Dry Powder Trolley (Cartridge)



MODEL	14134	14163	14166
Capacity	25KG	50KG	100KG
Extinguishing Agent	ABC Multipurpose Dry Powder		
Propellant	CO2 CART 3LTR	CO2 CART 3LTR	CO2 CART 5.4LTR
Operation Method	Cartridge Operated		
Test Standard	EN 1866		
Discharge Distance	11M	11M	12M
Discharge Time	25SEC	41SEC	99SEC
Height	1020MM	1050MM	1290MM
Width	430MM	450MM	540MM
Depth	535MM	550MM	700MM
Total Weight	60KG	85KG	120KG
Operating Temperature	-30°C to 60°C		
Working Pressure	14 BAR		
Test Pressure	30 BAR		
Fire Rating	233 IV B		
Part No.	FEM-AB- DC25	FEM-AB- DC50	FEM-AB- DC100

#### Information


Effective against **class A fires** involving ordinary combustible materials like wood, paper, cloth, furning, plastics, rubber, etc, usually of an organic nature, in which combustion normally takes places with the formation of glowing embers.

Effective against **class B fires** involving flammable liquids, solvents, oils, paints, thinner and liquefiable solids.

#### Instructions for use

1. Read instructions before using to ensure that you have selected the correct fire extinguisher for the fire you intend to fight.
2. Unroll hose.
3. Pull safety pin and turn on valve.
4. Aim at fire and squeeze handle

Ensure that extinguisher is located close to the work area and operators are trained in the use of extinguishers.

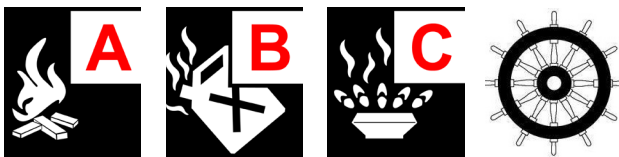

Wheelmark

