

BS 336 Instantaneous Reducing Hose Coupling

Reducing couplings are used to connect hose fittings of different diameters.

The common reducing coupling options are 2.5" to 1.5" and 2.5" to 2.0".



Information

Made according to BS 336 with rust resistant brass alloy.


Used in Singapore Fire Service

Manufactured to:

British Standard 336:2010
Specifications for fire hose couplings and ancillary equipment

Also known as:

BS Coupling, BS 336 Coupling, British Standard Coupling, Instantaneous Coupling

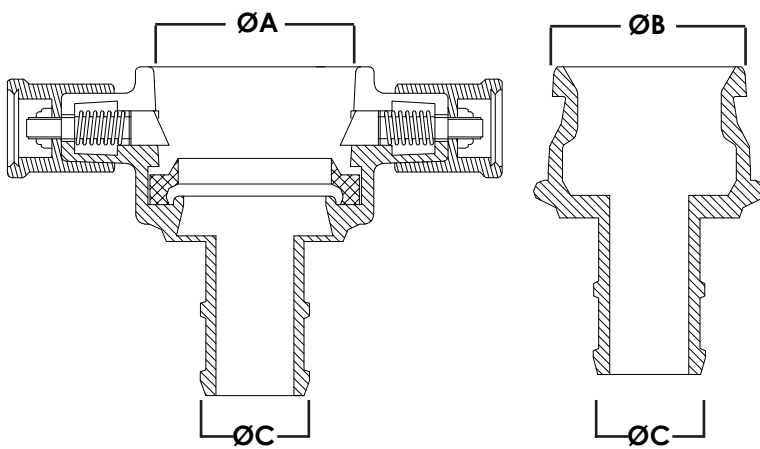

DESCRIPTION	ØA ID	ØB OD	ØC	MAT	PART NO
2.5" to 1.5" BS Reducing Coupling			1.5" Hose	BRASS	RED-G-BS2515
2.5" to 2.0" BS Reducing Coupling			2.0" Hose	BRASS	RED-G-BS2520

Due to constant improvements, product dimensions may differ slightly.



FIRE ARMOUR

14 Fan Yoong Rd, Singapore 629791 T 62666788 F 62663788
Email: firearmour@firearmour.com.sg